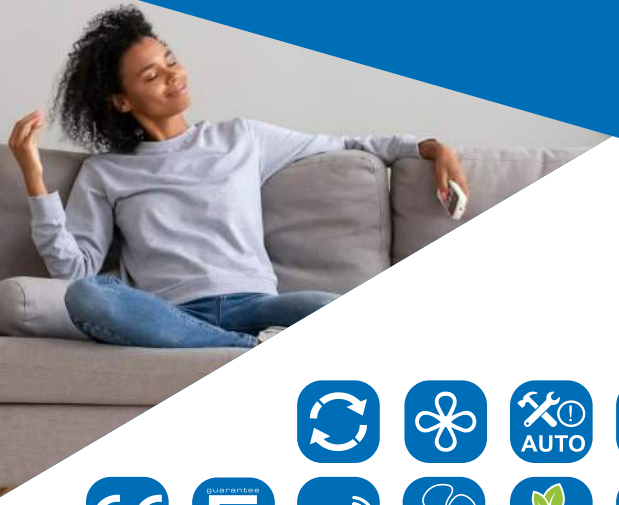

TOYOTOMI Japan

Local air conditioner
TAD-2335HP

Window kit included

Hose adapters

Local air conditioner

EAN code	4963505831097
Colour	White
Capacity (Cooling - Heating)	3.50 kW / 12000 Btu/hr - 2.6 kW /9000 Btu/hr
Power Cons. (Cooling / Heating)	1.35 kW / 1.13 kW
Current (Cooling / Heating)	5.9A / 5.1A
Tension	220 - 240 V / 50 Hz
Air Flow	320 m^3 / hr
Dehumidification Max.*	40.8 L/24hr
Volume	29~43 m^2
Refrigerant	R-290 / 175gr
Set Temperature Range	16 ~ 31 °C
Unit Protection	IP X0
Sound Pressure / Power level	53 dB(A) / 65 dB(A)
Dimension Unit / Carton	298x335x698 (W x D x H mm) / 345x393x888 (W x D x H mm)
Weight (Net. / Gross)	23.0 Kg / 25.0 Kg

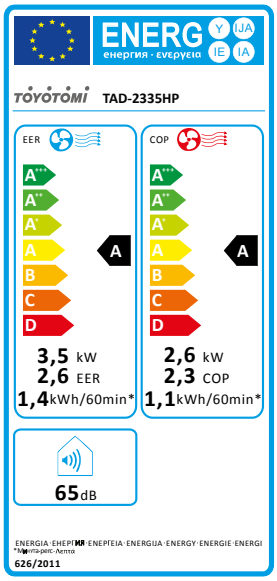

Dehumidification at 32 °C, 80% RH

Cooling & Heating
This unit can cool and at the same time also has a heating mode / function.

2-Speed Fan
Select the desired speed of the fan: low, medium or high. The display shows the selected speed.

Dehumidification
When the air conditioner (primarily) is used as a dehumidifier, you can opt for not using the exhaust hose to keep the warm air in the room. A fixed water outlet (continous drainage) will be necessary and more convenient. Maximum dehumidification capacity is 40.8 L per 24 hours.

Cool-down System
The exhaust hose will not only extract warm air from the room, but, at the same time, also will extract the water. The water is condensed and poured directly over the condensor, so water and hot air will be removed from the room through the exhaust hose. Thus, this cool-down system is more convenient and more economical.

Compliance with Commission Regulation (EU) 2023/826 under Directive 2009/125/EC
This device is fully compliant with EU Ecodesign standards applicable from 2026, ensuring eligibility for CE marking and market access across the European Economic Area.

WIFI control + Remote Control
The unit is equipped with a remote control but can also be remotely controlled via mobile phone and other related mobile devices.

24 Hour-Timer
Operating time of the device can be set up to 24 hours. The device switches off or turns on automatically when the set time has elapsed.

Anti-Dust Filter
The anti-dust filter absorbs the dust, which the indoor unit extracts from the room.

Large Air Outlet
ensures a large air flow rate of 320 m^3/h (max), enabling to cool volumes up to 29-43 m^2, giving a pleasant feeling of well-being.

Environment friendly refrigerant
This device uses a natural refrigerant, environmentally friendly R290. The overall performance of this refrigerant especially developed for cooling applications proved to be a better alternative with respect to energy efficiency and greenhouse impact as a replacement to R410 / R 32 refrigerant used in the past.

TOYOTOMI Japan

Toyotomi Europe Sales B.V.
Binnenveld 11, 5462 GK, Veghel
The Netherlands
Tel: +31 (0)413 82 02 95
www.toyotomi.eu • info@toyotomi.eu